




SHF Communication Technologies AG

Wilhelm-von-Siemens-Str. 23D • 12277 Berlin • Germany

Phone ++49 30 / 772 05 10 • Fax ++49 30 / 753 10 78


E-Mail: sales@shf.de • Web: <http://www.shf.de>

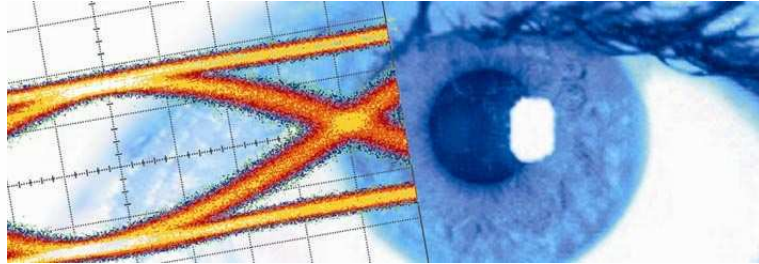

Datasheet

SHF 826H

Broadband Amplifier

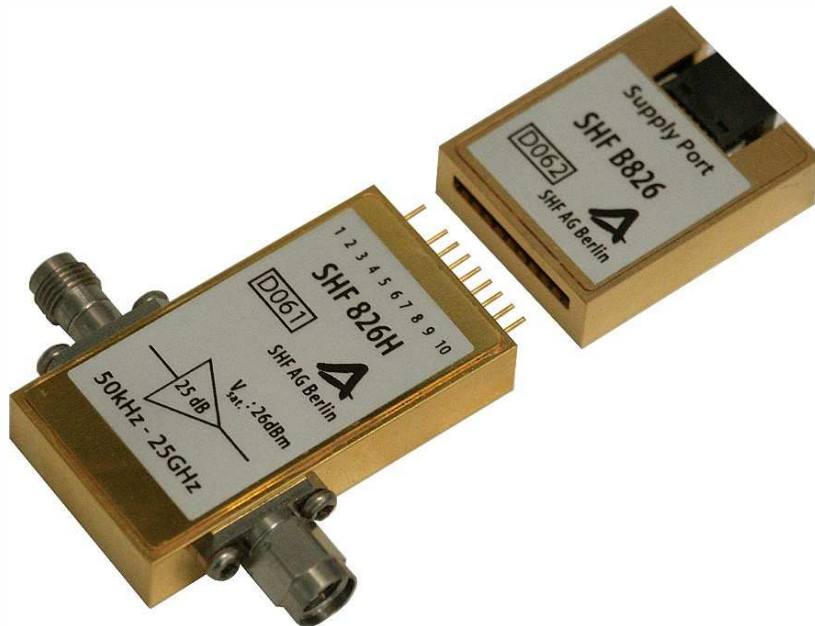



Description

The SHF 826H is a two stage amplifier based on special designed monolithic microwave integrated circuits (MMICs) to achieve ultra wide bandwidth and low noise performance.

The amplifier will be delivered with a removable Bias Box. This feature allows the use without any additional bias circuitry. The box should be used with the included ribbon cable which is made for the connection to standard laboratory connectors (for power supply and voltage level detector).

Due to this concept the amplifier provides the same ease of use like all other well known SHF laboratory amplifiers. Nevertheless the use without the bias box offers a flexibility which makes this amplifier to the ideal product for system applications.

Applications

- Optical Communications
- High-Speed Pulse Experiments
- Satellite Communications
- Research and Development
- Antenna Measurements
- Data Transmission

Available Options

- 01: DC return on input (max. ± 1.75 V, max. 35 mA)
- 02: Built-in bias tee on input
- 03: DC return on output (max. ± 1.75 V, max. 35 mA)
- 04: Built-in bias tee on output
- MT: Special tuning available to optimize performance with E/O modulators
Positive gain slope of up to +3 dB possible
- MP: Matches the phase of two amplifiers

The following options cannot be combined:

01 and 02
03 and 04
02 and 04



Electrical characteristics – SHF 826H

(Typical Data at 45°C case temperature, unless otherwise specified)						
Parameter	Symbol	Unit	Min	Typ	Max	Conditions
High frequency 3dB point	f_{HIGH}	GHz	25			0dB@40MHz
Low frequency 3dB point	f_{LOW}	kHz			70	0dB@40MHz
Small Signal Gain	G_P	dB	24	25		
Input Eye Amplitude	V_{IN}	V_{pp}			1	
Output Eye Amplitude	V_{OUT}	V_{pp}	11.8	12.3		$V_{in} \sim 0.68V_{pp}$
Saturated Output Eye Amplitude	V_{SAT}	V_{pp} (dBm)	12.6 (26)			
Controllable output voltage range		V_{pp}	V_{OUTmin}		V_{OUTmax}	$V_{in} \sim 0.68V_{pp}$,
Level control voltage	V_{OVC}	V	0		12.6	$V_{OUTmin} = (V_{OUTmax} - 3V)$; see note 1
Crossing control voltage	V_{XC}	V	-5		0	see note2
Output jitter, RMS value	J	ps		1	1.5	calculated value; see note3
Input return loss	S_{11}	dB		-10		< 19 GHz
Output return loss	S_{22}	dB		-10 -5		< 13 GHz < 16 GHz
Level detector output voltage	V_{LD}	V			6	
				1.5		with load 1k Ω , 20Gbit/s,NRZ, $2^{31}-1$
Input Bias Tee Voltage	V_{Bias_In}	V	-5		+5	with option 02 (max. 100 mA)
Output Bias Tee Voltage	V_{Bias_Out}	V	0		12	with option 04 (max. 100 mA)
Supply voltage	V_S	V	11.5	12	12.6	
Supply current	I_S	mA		750	800	
Power dissipation	P_D	W		9		@12V Supply Voltage
Input connector						1.85 mm; female
Output connector						1.85 mm; male
Dimensions		mm				81x26x9 excluding connectors

Note1: To maintain maximum eye amplitude keep the OVC-Input left floating or the level control voltage (OVC-Input) as high as ~ +11V (max 12.6V).

Note2: If the output eye amplitude is reduced a crossing control voltage (XC-Input) is needed to get an output signal with 50% crossing.

Note3: Signal source SHF BPG 44E; bit rate 20Gbps; pattern length: $2^{31}-1$ NRZ; Jitter in: ~350fs; V_{out} : ~12 V_{pp} ; $T_C = 45^\circ C$. Jitter will increase at higher temperature s.


Measured jitter values are corrected according to the formula: $J = (J_{out}^2 - J_{in}^2)^{1/2}$




Eye diagram at 20 Gbps – SHF 826H

Typical performance

Input Signal: **0.7 Vpp**

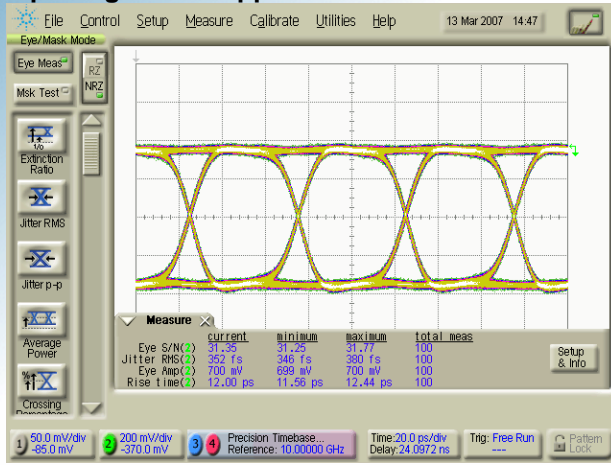


Output Signal: **13.51 Vpp**

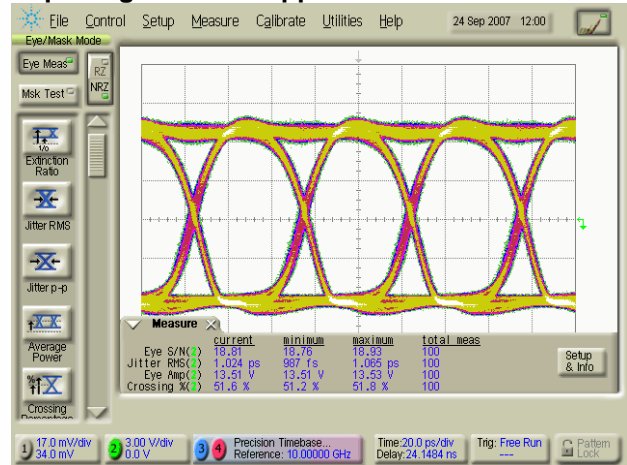

$V_{OVC} = > 11 V$ / or OVC-Input left floating;
 $V_{XC} = 0 V$ / or XC-Input left floating

Reduced Output Signal: **9.5 Vpp**

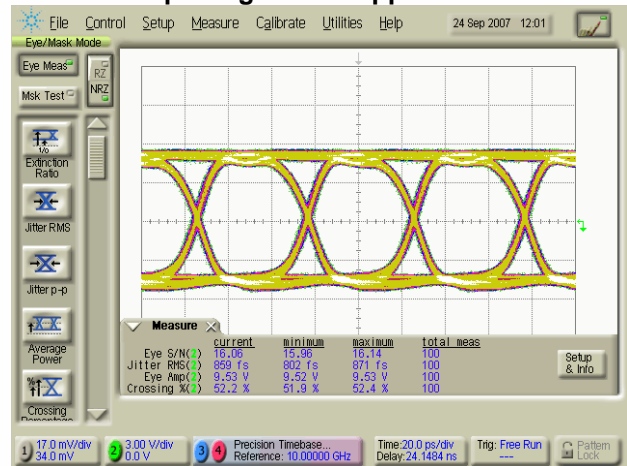





$V_{OVC} = 0 V$; $V_{XC} = -2.7 V$ (for 50% crossing)

Measured with Agilent 83484A with 86118A plug-in (70 GHz) and 86107A precision time base. Signal source: SHF BPG 44 E; Pattern length: $2^{31}-1$ (NRZ).




S-Parameters

Typical performance

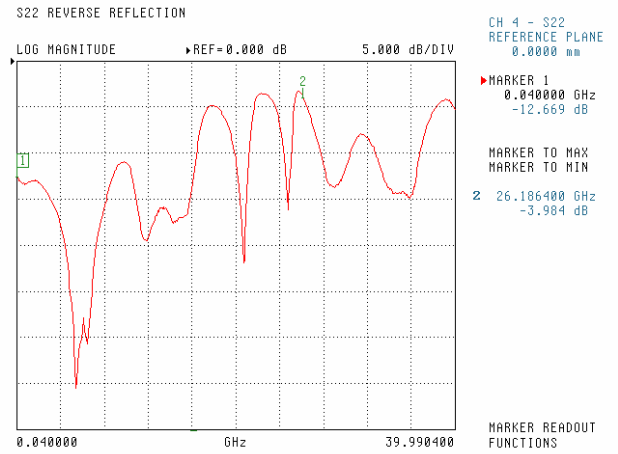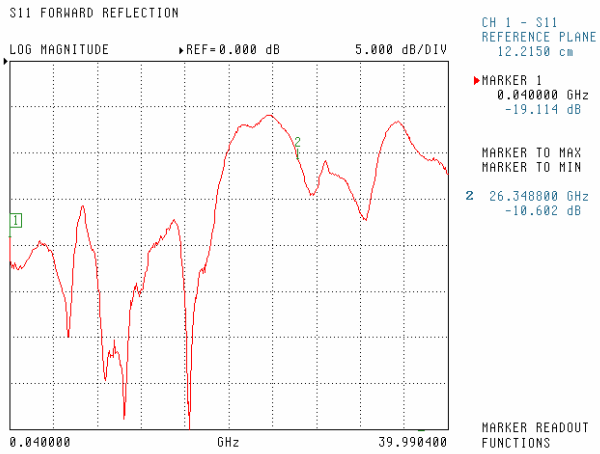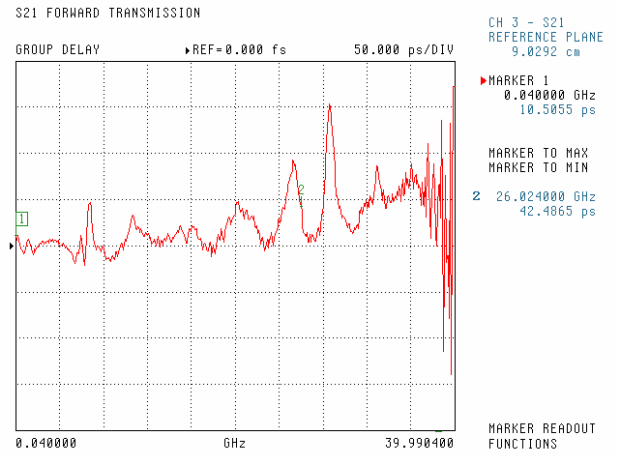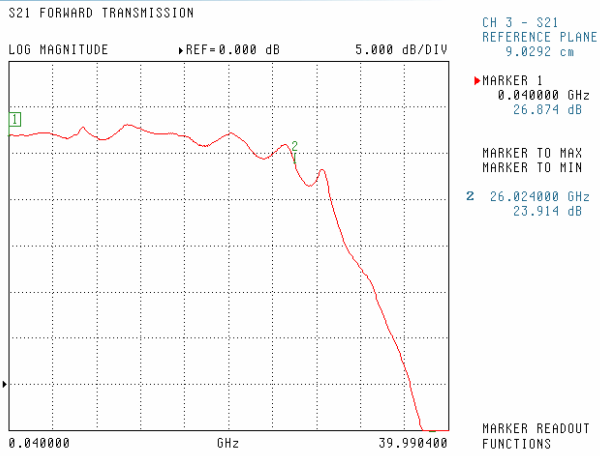



Mechanical drawing – SHF 826H with Bias Box

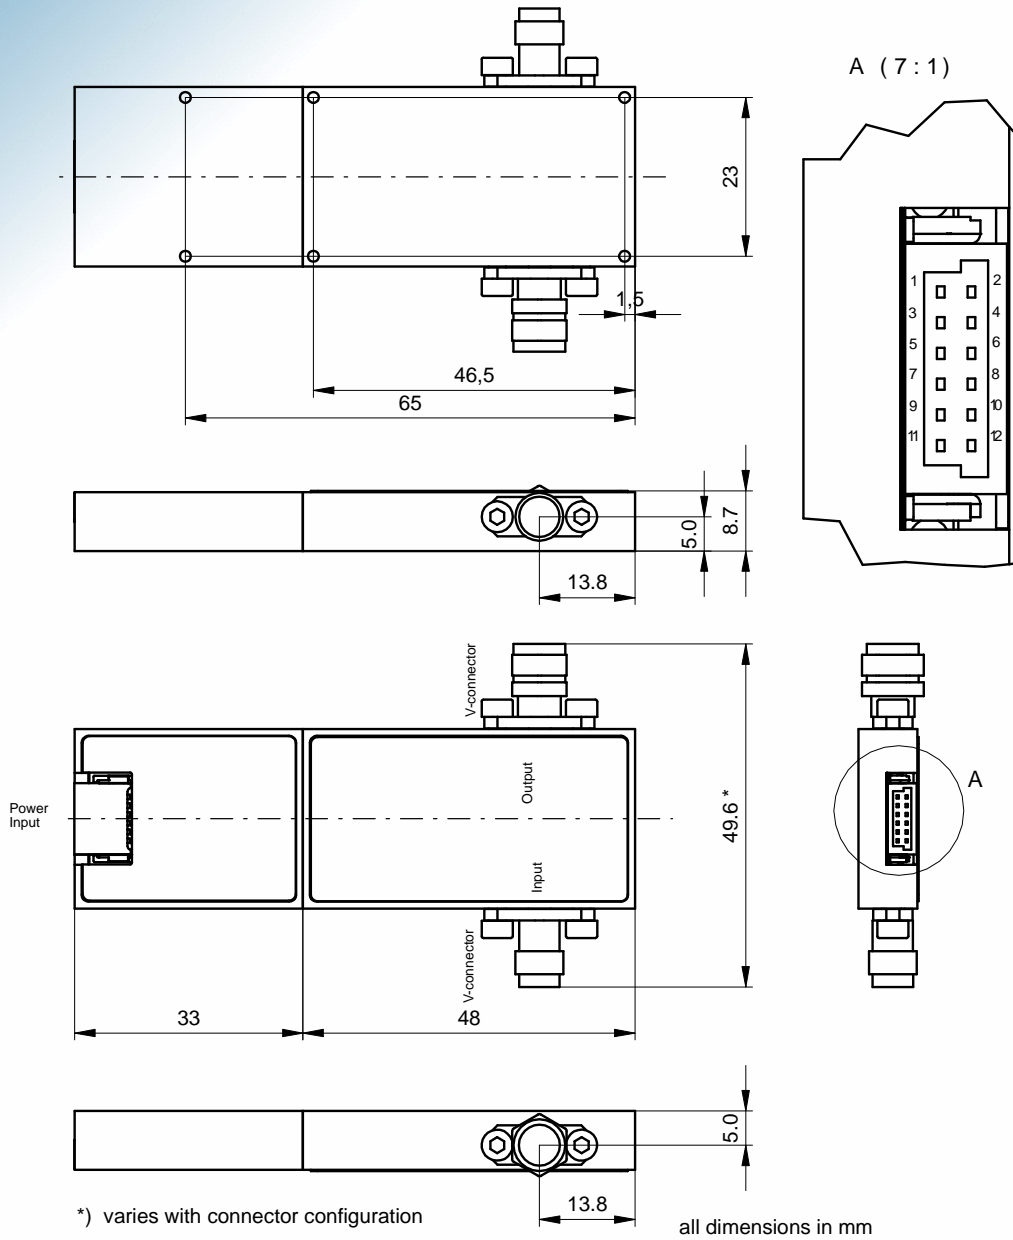


Pin	Function
1	Bias- Tee
2	Reserved
3	Reserved
4	Crossing Control Input / V_{XC}
5	Not Connected
6	Level Detector Output / V_{LD}

Pin	Function
7	GND
8	Reserved
9	Supply Voltage / V_S
10	Output Voltage Control Input / V_{OVC}
11	Supply Voltage / V_S
12	GND



Mechanical drawing – SHF 826H with Heatsink

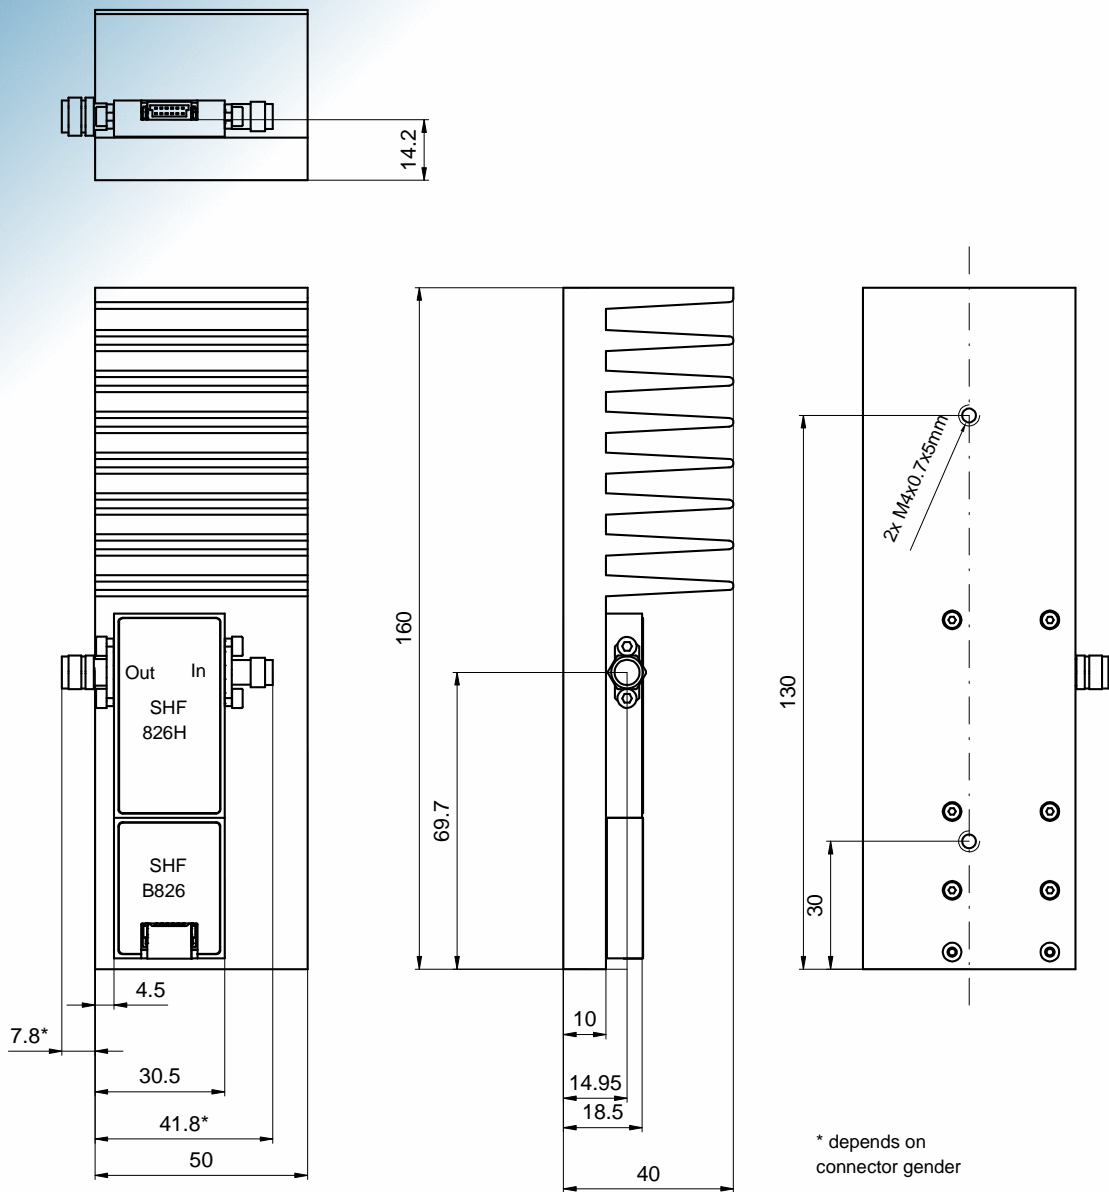

Thermal resistance of heatsink approximately 2.8 K/W

For permanent mounting remove the heatsink from the amplifier. In that case please ensure that adequate cooling of the amplifier is guaranteed. To remove the heatsink from the amplifier unscrew the six screws on the bottom side of the heatsink.



Bias Cable – SHF 826H

Pin	Function	Colour
1	Bias-Tee	brown
2	Reserved	
3	Reserved	
4	Crossing Control Input / V_{XC}	white
5	Not Connected	
6	Level Detector Output / V_{LD}	blue
7	GND	black
8	Reserved	green
9	Supply Voltage / V_S	red
10	Output Voltage Control Input / V_{OVC}	yellow
11	Supply Voltage / V_S	red
12	GND	black

Please ensure that always both available pins (7 & 12 for ground and 9 & 11 as supply voltage) are used.

